



8. INSTALLATION

BACK PANEL

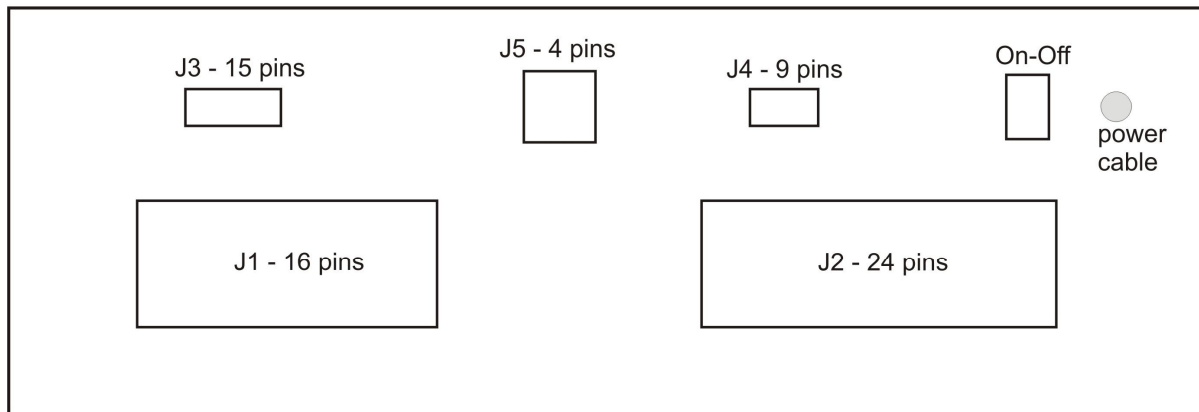

8.1 Plug for Traps - J1

The 15 trap machines must be connected to the unit as in the following picture:

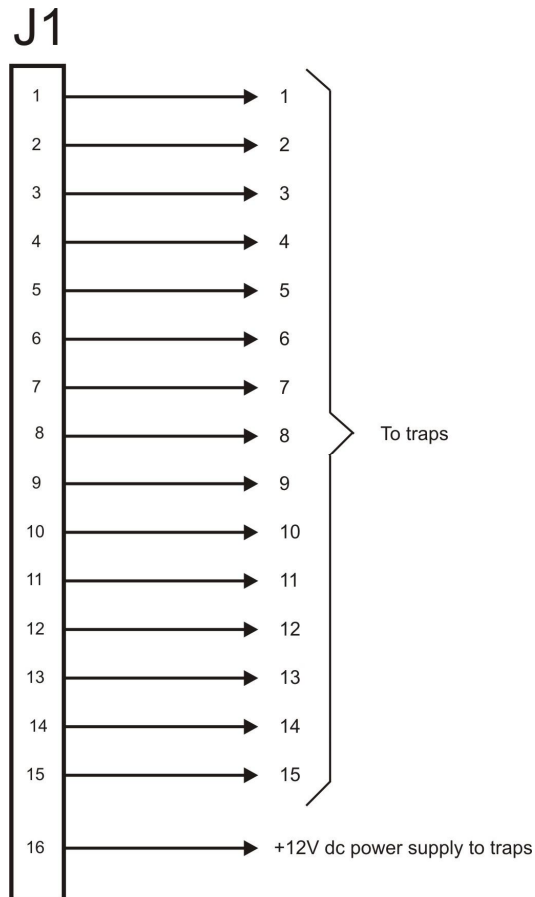

8.2 Plug for Stand Lamps and No-Bird push-button – J2

This plug is used to connect the 8 microphones, the 8 stand lamps and the additional No-Bird and Pull push-buttons (optional). External power supply must be used only if trap machines need a voltage higher than 12Vdc. The external power supply must be a CONTINUOUS voltage with a maximum of 2 Ampere. The bridge between pins 23 and 24 must be always closed with a jump. Only for external power supply must be left open.

NOTE: the stand lamps must operate at 12Vdc with a maximum current of 100 mA.
It is recommended to use LED lamps manufactured by EP (EPL series).

