

# Scoreboard EP098TBH 7-6-36

*Multi-Pull*

THE SYSTEM FOR SHOOTING  
GROUND AUTOMATION

## ■ Scoreboard EP098TBH 7-6-36

*This scoreboard model is usually installed on the shooting ranges where competition qualifications are held. It allows spectators and athletes to follow the competition in real time. It presents the following information:*

- ◆ *Name of athletes with 8 characters or bib number + Noc*
- ◆ *Position of the shooter to shoot*
- ◆ *Sequence of shots made with centers and zeros in different colors (green and red)*
- ◆ *Total for each athlete competing*

*This scoreboard must be connected with a data cable to the **EP095M** control unit and operation will be completely automatic. For the names of the athletes it is instead necessary to connect the second input of this scoreboard to the **EP096GM** Data Concentrator normally positioned in the control room which, through the *Multi-Pull* management software, is able to send the various squads of athletes on the various ranges automatically gradually when the competition takes place.*

*The LEDs used have a very high brightness, the display board is visible in direct sunlight and has a wide viewing angle.*

*In the event of a power failure, the competition data is saved and archived. As soon as power is restored, the display-board will display the same situation as before the interruption.*

*All models of the *Multi-Pull* - **EP098T** series are easy to install, they are all built to withstand severe thermal stress and adverse weather conditions.*

*They are made of anodized and painted aluminum and the structure is completely sealed. If necessary, the displayboards can be provided with special support structures.*

## ■ Technical Characteristics

<i>Dimensions:</i>	<i>331 x 127 x 16 cm.</i>
<i>Weight:</i>	<i>150 kg</i>
<i>Data Interface:</i>	<i>RS485</i>
<i>Character height:</i>	<i>7,5 cm.</i>
<i>Number of rows:</i>	<i>6</i>
<i>Characters for row:</i>	<i>36</i>
<i>Input voltage:</i>	<i>110 VAC ÷ 240 VAC / 47 Hz ÷ 63 Hz</i>
<i>Power consumption:</i>	<i>550 W</i>
<i>Operating temp. range:</i>	<i>-10°C ÷ +45°C</i>
<i>Protection from lightning:</i>	<i>Varistors, Transil, gas discharge</i>




# Scoreboard EP098TBH 7-6-36

## Multi-Pull

THE SYSTEM FOR SHOOTING  
GROUND AUTOMATION

### Installation

EP098TBH 7-6-36 in Shenyang

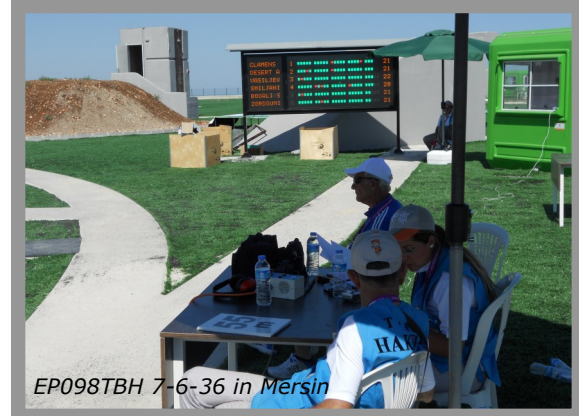


EP098TBH 7-6-36 in Mersin

EP098TBH 7-6-36

BIB	NOC	P	TARGETS	TOT
1234	ITA	1		23
2313	FRA	2		22
1222	SPA	3		23
4322	USA	4		24
1121	ITA	5		24
2321	ITA	6		21

EP098TBH 7-6-36 Foundation

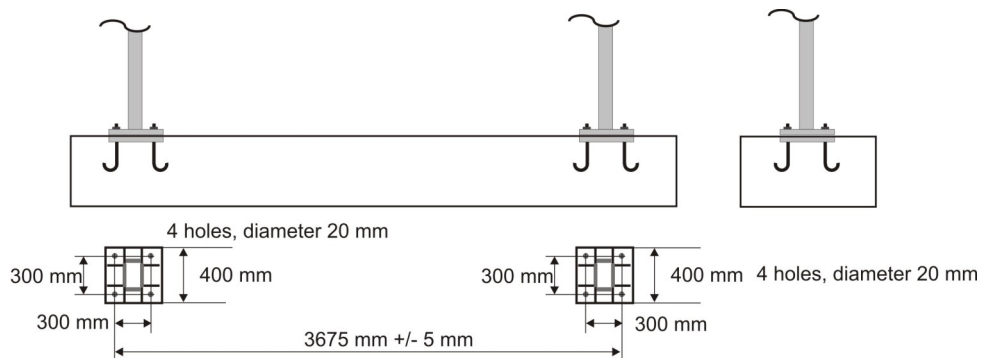

Electronica Progetti

**E.P. Electronica Progetti s.r.l.**

Via Traspontina 25, 00040 Ariccia (RM) Italy

tel.: +39 06 9342181 Fax: +39 06 9344987

[www.electronicaiprogetti.com](http://www.electronicaiprogetti.com)

[www.multipullsoft.it](http://www.multipullsoft.it)

[info@electronicaiprogetti.com](mailto:info@electronicaiprogetti.com)